Valve Regulated Lead Acid Battery

WP40-12

Specifications

Nominal Voltage(V)

12V

Nominal Capacity

20 hour rate	(2A	to	10.50V)	40Ah
10 hour rate	(3.8A	to	10.50V)	38Ah
5 hour rate	(6.8A	to	10.20V)	34Ah
1 C	(40A	to	9.60V)	22.67Ah
3 C	(120A	to	9.60V)	16Ah

Weight

Approx. 13.4kg(29.5Lbs.)

Internal Resistance (at 1KHz)

Approx. 7.5 mΩ

Maximum Discharge Current for

5 seconds: 600A

Charging Methods at 25℃(77℉)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/℃/cell	
Maximum Charging Current：	12A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/℃/cell	

Operating Temperature Range

Charge	-15℃(5℉)	to	40℃(104℉)
Discharge	-15℃(5℉)	to	50℃(122℉)
Storage	-15℃(5℉)	to	40℃(104℉)

Charge Retention (shelf life) at 20℃(68℉)

1 month	97%
3 month	92%
6 month	85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Design Life

EUROBAT(20℃): 3-5 YEARS STANDARD COMMERCIAL

Terminal

F4

Dimensions

Length (L)	$198\pm^{2}_{1}(7.80\pm^{0.08}_{0.04})$
Width (W)	$166\pm^{2}_{1}(6.54\pm^{0.08}_{0.04})$
Height (H)	$171\pm^{2}_{1}(6.73\pm^{0.08}_{0.04})$
Overall Height (HT)	$171\pm^{2}_{1}(6.73\pm^{0.08}_{0.04})$

mm(inch)





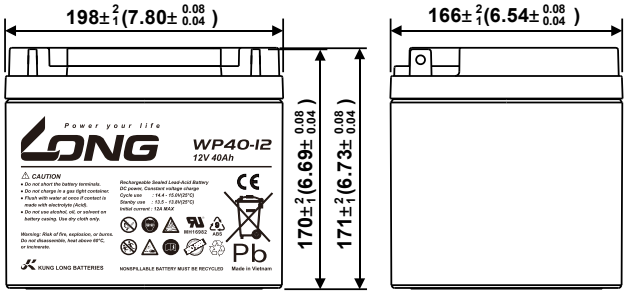

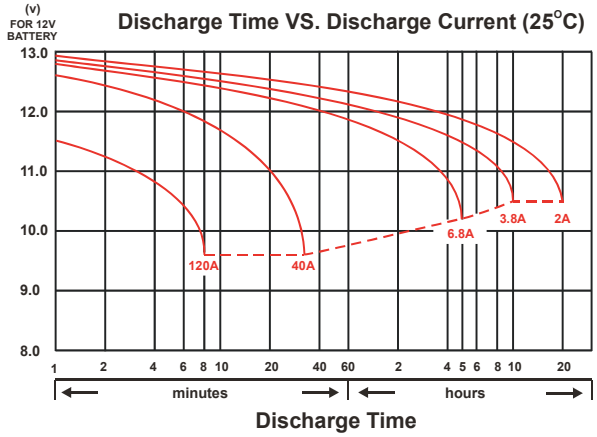

Power your life

Valve Regulated Lead Acid Battery

WP40-12

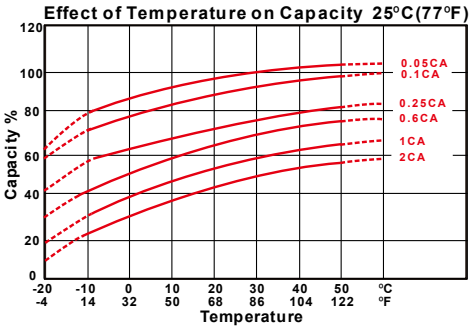

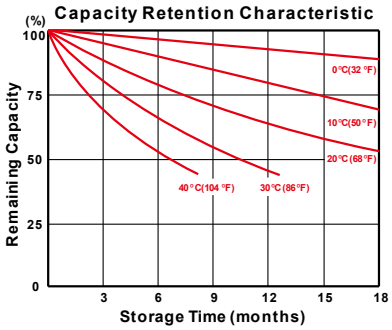

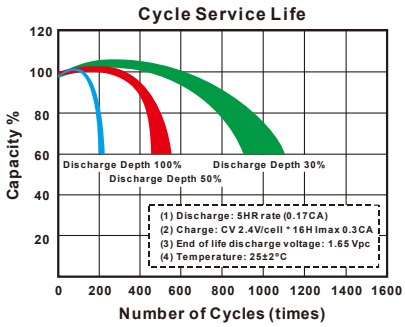



- PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	205	230	255	265	270	275	280
10	min	155	170	180	190	194	197	200
15	min	130	136	142	146	148	149	150
30	min	81.5	84.5	87.0	89.5	90.5	91.0	91.5
60	min	49.5	50.2	50.9	51.2	51.4	51.5	51.5
120	min	27.7	28.8	29.7	30.2	30.5	30.8	31.0
180	min	20.5	21.0	21.5	21.6	21.6	21.7	21.8
240	min	16.1	16.6	17.0	17.4	17.6	17.8	18.0
300	min	13.6	13.9	14.2	14.4	14.6	14.7	14.8
480	min	9.47	9.56	9.64	9.69	9.72	9.75	9.78
600	min	7.50	7.75	7.95	7.97	7.98	7.99	7.99
1200	min	4.10	4.20	4.30	4.35	4.38	4.40	4.41

- Discharge Rates in Amperes to Various End Voltages at 25℃(77℉)

Time \ End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	110	125	140	145	150	153	157
10	min	83.0	91.8	99.5	103	104	105	105
15	min	68.5	74.7	80.5	82.0	82.5	82.5	83.0
30	min	41.5	43.6	45.5	46.2	46.6	46.8	47.0
60	min	24.1	24.8	25.5	26.0	26.2	26.3	26.4
120	min	14.9	15.3	15.6	15.8	15.8	15.9	16.0
180	min	10.5	10.9	11.2	11.4	11.5	11.6	11.7
240	min	8.64	8.85	9.05	9.16	9.18	9.19	9.20
300	min	7.00	7.20	7.35	7.37	7.38	7.39	7.40
480	min	4.70	4.79	4.88	4.90	4.92	4.94	4.95
600	min	3.89	3.95	4.00	4.04	4.06	4.08	4.10
1200	min	2.00	2.07	2.15	2.17	2.18	2.19	2.20

All data on the spec. sheet is an average value:
The tolerance range : X<6min(+15%~-15%), 6min≦X<10min(+12%~-12%),10min ≦X < 60min(+8% ~-8%), X≧60min(+5%~-5%)

260626-1N

廣隆光電科技股份有限公司
KUNG LONG BATTERIES INDUSTRIAL CO., LTD.

Head Quarter Service TEL: +886-49-2254-777 FAX: +886-49-2255-139 E-mail: sales@mail.klb.com.tw
USA Customer Service TEL: +1-949-328-7936 FAX: +1-949-266-9917 E-mail: sales@kunglong.com
Vietnam Customer Service TEL: +84-272-3779666 FAX: +84-272-3779476 E-mail: sales@mail.klb.com.tw

Contents in this data sheet are subject to change for improvement without prior notice to users. For clarifications and updated information, please contact us.