

⚡ Specifications

Nominal Voltage(V)

12V

Nominal Capacity

10 hour rate	(0.95A to 10.50V)	9.5Ah
5 hour rate	(1.62A to 10.20V)	8.1Ah
1 C	(9.5A to 9.60V)	4.28Ah
3 C	(28.5A to 9.60V)	3.33Ah

Weight

Approx. 3.56kg(7.83Lbs.)

Internal Resistance (at 1KHz)

Approx. 11 mΩ

Cold Cranking Amperes (-17.8 °C)

175A

High rate discharge characteristics (-10 °C)

Discharge current (A)	100A
Duration (min)	1.7min
5 second voltage (V)	9.5V

Operating Temperature Range

Charge	-15 (5 °C) to 40 (104 °F)
Discharge	-15 (5 °C) to 50 (122 °F)
Storage	-15 (5 °C) to 40 (104 °F)


Charge Retention (shelf life) at 20 °C (68 °F)

1 month	92%
3 month	90%
6 month	80%

Case Material

ABS UL94 HB


Terminal Shape

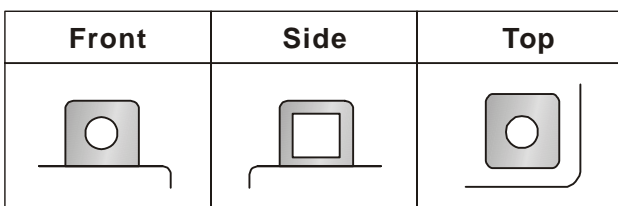


⚡ Dimensions

Length (L)	151+2-1 (5.94+0.08-0.04)
Width (W)	88+2-1 (3.46+0.08-0.04)
Height (H)	103+2-1 (4.06+0.08-0.04)
Overall Height (HT)	103+2-1 (4.06+0.08-0.04)

mm(inch)

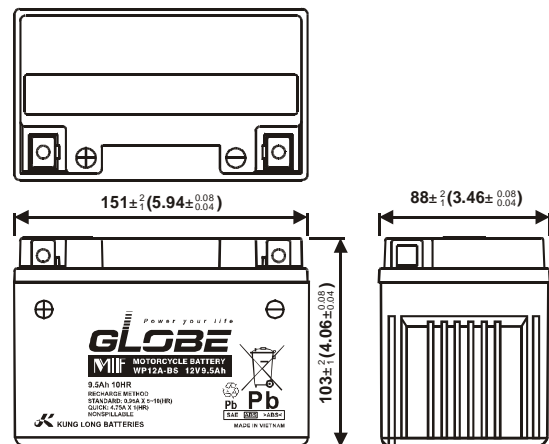

(V) FOR 12V BATTERY Discharge Time VS. Discharge Current (25 °C)

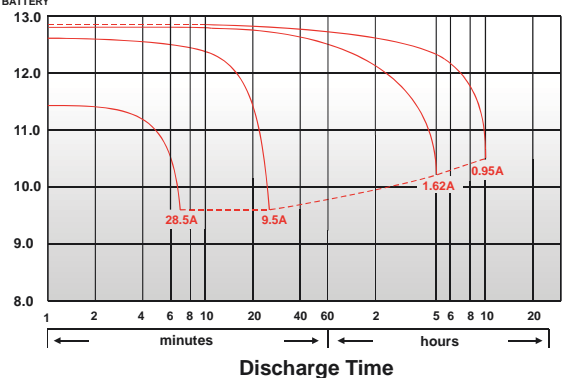

290318-1B-V